



Operating lights in continuous mode – Brown, Black & Gray to +24VDC, Blue to GND

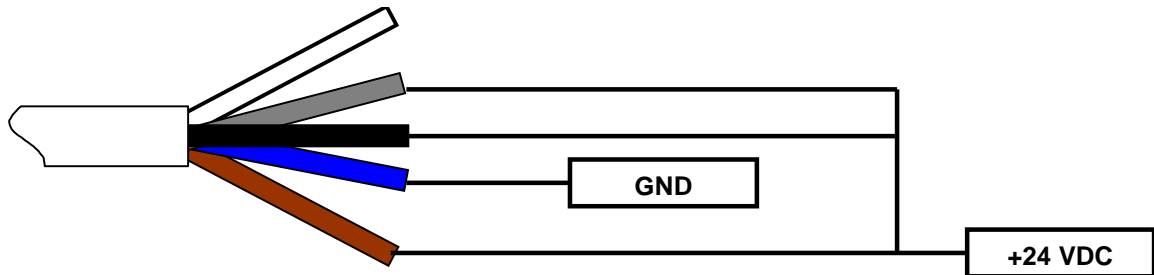

Pin and Cable Color Assignment



Connector on Light

- 1 = 24VDC
- 2 = NPN STROBE
- 3 = GND
- 4 = PNP STROBE
- 5 = 0-10VDC Analog

Standard M12 mating cable color

- BROWN
- WHITE
- BLUE
- BLACK
- *GRAY (GREEN/YELLOW)

If Analog 0-10 VDC is not used to control light intensity; +VDC (24VDC) must be connected to Analog Input. Jumper Gray wire to Brown wire.