

Spacer for increasing the focal distance


Projector was designed with integral extension tube to make all lenses focus at a shorter distance than inscribed on the lens focus ring because most projection distances are fairly short. To increase the focal distance a spacer ring is needed. The spacer is recommended when working distances of greater than 2 meters are needed.



Tools: small screwdriver or tweezers



Pattern
Retaining Ring

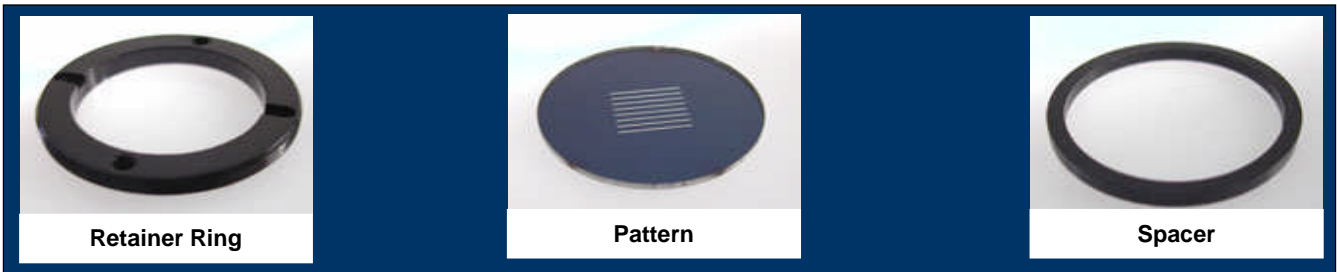

Retainer Ring

Pattern

Spacer

Removal of Retaining Ring

Screwdriver or Tweezers to remove retaining ring. Retaining Ring will turn Clockwise to install and Counter-Clockwise to remove. There are 2 small holes and 2 slots in ring to install/remove.

Arrangement of Retainer Ring, Patterns and Spacer.

